

# FCR PRIMA Tm

High-speed image processing tabletop FCR with mammography compatibility



# Brand new world's smallest class all-in-one tabletop CR equipped with Mammography Image reading as standard.


## Compatible with multiple cassette sizes, covering a wide range of examination

Cassettes of any size can be read. This instrument is applicable to a variety of test settings, ranging from long-view imaging of the entire length of the vertebra or lower limbs to pantomography.



## Realizing 50 μm high-definition reading of mammography images

For the first time in the PRIMA series, the model is equipped with a mammography image reading function. With high definition reading and the fastest processing in the tabletop class, this model brings about a seamless workflow to your diagnosis.

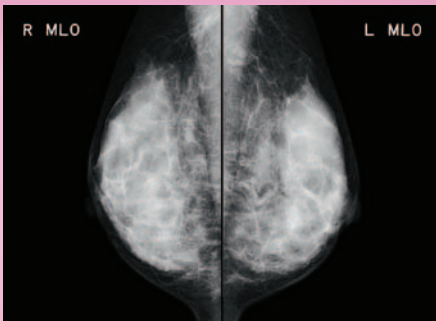


## Space-Saving Design

FCR PRIMA Tm, with its light and compact tabletop design, can be placed on a desk, shelf or anywhere space is limited. As this is a fully digital reader, neither a darkroom nor automatic processor is required.



## High-Speed Processing

With the highest processing speed in its class, this model can process 73 images per hour. In addition, 40 mammography images can be processed within an hour, allowing smooth image reading.

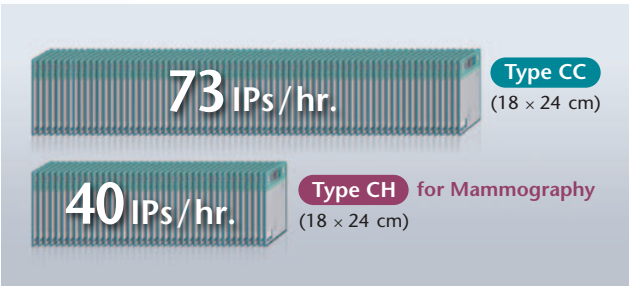

## High-Quality Mammography Images


Fujifilm's Image Intelligence™ technology automatically enables stable and optimized high-quality images.



### Multi-Frequency Processing


\*Optional software

Enhances FCR images. All diagnostic scopes will be enhanced except for noise.

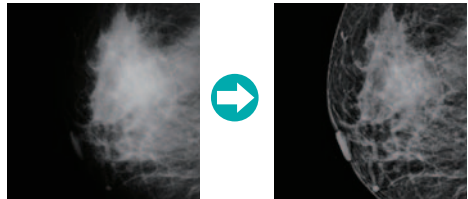


### Dust-proof Mechanism

The insertion slot of the cassette is equipped with functions that prevent the entry of dust and automatically clean the inside of the instrument to remain dust-free.



## System Configuration

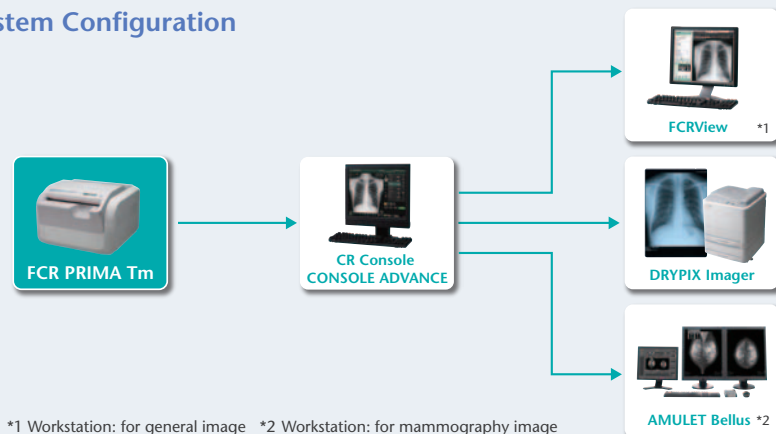

\*1 Workstation: for general image \*2 Workstation: for mammography image

## FCR PRIMA Tm Specifications


|                                |               |                                                                                                                                                                                                                                                        |
|--------------------------------|---------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Standard Components            |               | FCR PRIMA Tm (Model: CR-IR 392)                                                                                                                                                                                                                        |
| Applicable Console             |               | CR Console, Console Advance                                                                                                                                                                                                                            |
| Main Connectable Imagers       |               | DRYPIX PRIMA, DRYPIX 4000, DRYPIX 5000, DRYPIX 7000, DRYPIX Plus, DRYPIX Smart                                                                                                                                                                         |
| Supplies                       | Imaging Plate | ST-VI (standard type)<br>35 × 43 cm (14" × 17"), 35 × 35 cm (14" × 14"), 10" × 12", 8" × 10", 24 × 30 cm, 18 × 24 cm, 15 × 30 cm<br>HR-VI (high-resolution type)<br>24 × 30 cm, 18 × 24 cm                                                             |
|                                | IP Cassette   | Type CC<br>35 × 43 cm (14" × 17"), 35 × 35 cm (14" × 14"), 10" × 12", 8" × 10", 24 × 30 cm, 18 × 24 cm, 15 × 30 cm<br>Type CH<br>24 × 30 cm, 18 × 24 cm<br>Type LC<br>35.4 × 124.5 cm, 35.4 × 101.7 cm, 35.4 × 83.0 cm, 25.2 × 58.0 cm, 24.0 × 57.0 cm |
| Time Required for IP Feed/Load |               | Min. 49 sec.                                                                                                                                                                                                                                           |

This equipment is a Class 1 laser product (IEC60825-1:2001).

|                               |                                                                                                                                      |
|-------------------------------|--------------------------------------------------------------------------------------------------------------------------------------|
| Processing Capacity           | Up to 73 IPs/hr.                                                                                                                     |
| Reading Specification         | 10 pixels/mm, 5 pixels/mm, 20 pixels/mm                                                                                              |
| Time to Start on Display      | Min. 33 sec.                                                                                                                         |
| Time to Print on DRYPIX Smart | Approx. 165 sec. (Approx. 155 sec.)*<br>in case of 35 × 43 cm (14" × 17")                                                            |
| Number of Stacker             | 1                                                                                                                                    |
| Network                       | 10 Base T/100 Base TX                                                                                                                |
| Dimensions (W × D × H)        | 560 × 540 × 392 mm (22" × 21" × 15")                                                                                                 |
| Weight                        | 39 kg (86 lbs.)                                                                                                                      |
| Power Supply Conditions       | Single phase 50-60 Hz<br>AC120-240V ±10% 1.9A (max)                                                                                  |
| Environmental Conditions      | Operating Conditions:<br>• Temperature: 15-30°C<br>• Humidity: 15-80%RH (No dew condensation)<br>• Atmospheric pressure: 750-1060hPa |

\*In the high speed mode

## Dimensions

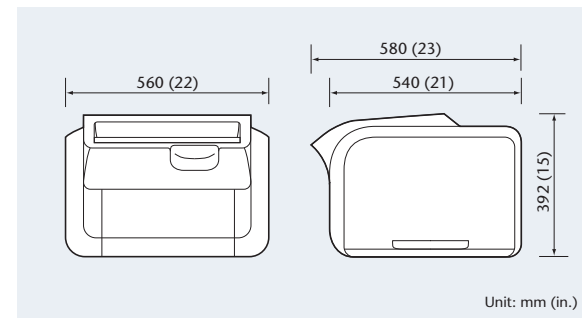


## IP Cassette



## Compatible with CR Console/Console Advance

The CR Console/Console Advance optimizes your mammography examinations with its advanced design and features. Correspondence to Fujifilm Mammography QC Program with 1Shot Phantom.



## Compatible with Fujifilm Mammography QC Program

Fujifilm Mammography QC Program is a dedicated quality control program applicable to FUJIFILM digital mammography system. This program enables the system to keep a stable image quality for both screening and diagnosis.



FUJIFILM supports the Pink Ribbon Campaign for early detection of breast cancer

Specifications are subject to change without notice. All brand names or trademarks are the property of their respective owners. In some countries, regulatory approval may be required to import medical devices. For the availability of these products, please contact your local sales representatives.



CLASSIFIED  
WITH RESPECT TO ELECTRIC SHOCK, FIRE  
AND MECHANICAL HAZARDS ONLY  
IN ACCORDANCE WITH UL2601/CAN/CSA C22.2 NO.601  
IEC 60601-1  
S3MK

FCR PRIMA Tm (CR-IR 392) CE 0123

**FUJIFILM**  
Value from Innovation

FCR Solution

FCR PRIMA Tm **NEW**

**FCR PRIMA Tm**

High-speed image processing tabletop FCR with mammography compatibility



**FUJIFILM**

FUJIFILM Corporation

26-30, NISHIAZABU 2-CHOME, MINATO-KU, TOKYO 106-8620, JAPAN

<http://www.fujifilm.com/products/medical/>

Ref. No. XB-1026E (SK-14-11-F1079-F9711) Printed in Japan ©2014 FUJIFILM Corporation